


HOSE						FERRULE		CRIMPING PARAMETERS					
Family	Description	Short Code	ID mm	ID Inch	ID Dash	Product Code	SAP Code	Internal Skive Length +1/-0 mm	Internal Skive Dia ±0,4 mm	External Skive Length +1/-0 mm	External Skive Dia ±0,4 mm	L minimum mark mm	Crimping Dia ±0,1 mm
FXP2	FXP2 MT	822	6	1/4	04	H1100SK1-040000	1233077	0,0	0,0	19,0	11,2	0,0	16,3
FXP2	FXP2 MT	822	8	5/16	05	H1100SK1-050000	1233078	0,0	0,0	19,0	12,7	0,0	18,1
FXP2	FXP2 MT	822	10	3/8	06	H1100SK1-060000	1233079	0,0	0,0	20,0	15,0	0,0	20,1
FXP2	FXP2 MT	822	13	1/2	08	H1100SK1-080000	1233080	0,0	0,0	26,0	18,6	0,0	24,3
FXP2	FXP2 MT	822	16	5/8	10	H1100SK1-100000	1233081	0,0	0,0	28,0	21,4	0,0	26,8
FXP2	FXP2 MT	822	19	3/4	12	H1100SK1-120000	1233082	0,0	0,0	33,0	25,4	0,0	30,8
FXP2	FXP2 MT	822	25	1	16	H1100SK1-160000	1233083	0,0	0,0	37,0	33,3	0,0	38,4
FXP2	FXP2 MT	822	32	1 1/4	20	H1100404-200000	1234766	0,0	0,0	41,0	39,2	0,0	48,2
FXP2	FXP2 MT	822	38	1 1/2	24	H1100104-240000	1201546	0,0	0,0	36,0	47,1	0,0	54,4
FXP2	FXP2 MT	822	51	2	32	H1100404-320000	1234768	0,0	0,0	60,0	61,1	0,0	73,3

CRIMP CHART VALUES ALSO APPLICABLE TO THE FOLLOWING HOSES :

Family	Short Code
FXP2-HT	8X5
FXP2-STF	8A9
FXP2-TWIN	8E5
FXP2-LT	8U1
FXP2-TWIN-SM	8K6

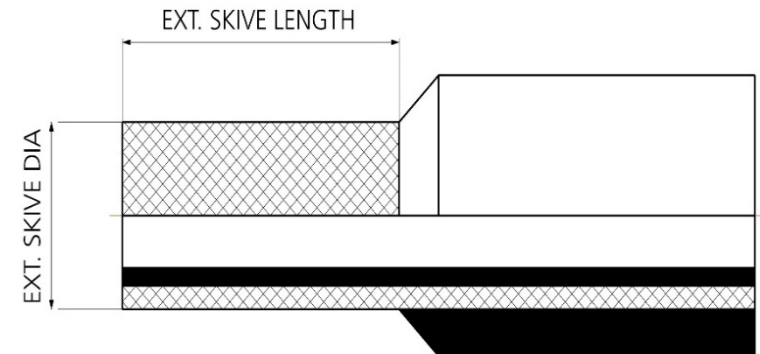

TEC

Industrial